



2017+ International Installation Guide

Model: SS-7

2017 + International Installation Guide

Contents



Smart Starter Control Module



Ignition Harness



Datalink Harness



Auxiliary Harness



Auto Start Switch



Hood Switch



Start-up Buzzer



Neutral Switch
(only provided for Manual
transmission)



Warning (5) + Auto Start
Switch (1) Decals

2017 + International Installation Guide

Step 1: Pre-Installation Safety Procedure

- Ensure that the vehicle is parked on level ground
- Place the transmission into Neutral
- Apply the Parking Brake and verify that it has been set
- Remove the key from the ignition

Step 2: Select Location for Smart Starter Control Module

- The Smart Starter control module can be mounted in a variety of locations depending on user preference and space availability in the vehicle
- Common mounting locations include: 1) behind the doghouse, 2) behind the dash, and 3) behind the instrument cluster
- Select a location with easy access, ideally towards the top of the dash or as close to the windshield as possible, where the control module can be tightly secured with zip ties

Step 3: Connect the Power Supply

- Locate the 8-pin connector harness labeled “Ignition Harness”.
- There will be 2 groups of wires connected to this harness: Group 1) a T-harness that is terminated with two ignition adaptors and Group 2) a power harness consisting of 2 wires (Red and Black).
- The red wire will be terminated with a fuse tap containing a 10-amp fuse. Verify that the 10-amp fuse in the fuse holder is securely connected. The black wire will be terminated with a ring terminal.
- Locate a constant 12V (+) fuse location that has power when the key is in the OFF position, and locate a ground connection. Using a voltage tester, verify the constant 12V (+) supply has power when the key is in the off position and verify the ground connection. Once verified, connect the red wire to the constant 12V (+) supply and the black wire to the ground connection.
- Secure the harness with zip-ties as needed

2017 + International Installation Guide



Attach the black ground lead to the metal brace below and to the right of the fuse panel.

2017 + International Installation Guide


NOTE – A clean metal surface can be used to connect the ground lead. Verify the ground connection with a multimeter before securing the ground wire to these bolts using the included nut.

DO NOT PLUG THE 8-PIN IGNITION HARNESS INTO THE SMART STARTER CONTROL MODULE UNTIL STEP 9 HAS BEEN COMPLETED


Step 4: Connect the Ignition Harness

- Remove interior dash panels to expose the vehicle's ignition switch and ignition harness.
- Unplug the ignition switch from the vehicle's ignition harness.
- Run the Group 1 bundle of wires from the Smart Starter Ignition Harness to the vehicle's ignition.
- Use the included T-taps to connect the Smart Starter ignition harness to the truck ignition harness:
 - Connect the Yellow wire with the International ignition harness wire that connects to the Battery (BAT) terminal on the ignition switch
 - Connect the Green wire with the International ignition harness wire that connects to the Starter (ST) terminal on the ignition switch
 - Connect the White wire with the International ignition harness wire that connects to the Accessory (ACC) terminal on the ignition switch
 - Connect the Blue wire with the International ignition harness wire that connects to the Ignition (IGN) terminal on the ignition switch
- Install the T-tap by placing the open end over the International ignition harness wire and placing the Smart Starter ignition wire into the closed end. Press the metal contact down with pliers so that it splices both wires, and close the plastic clamp by pressing down until the latch locks. Ensure the T-tap is securely closed, and the splice connection is made.


HOW TO USE

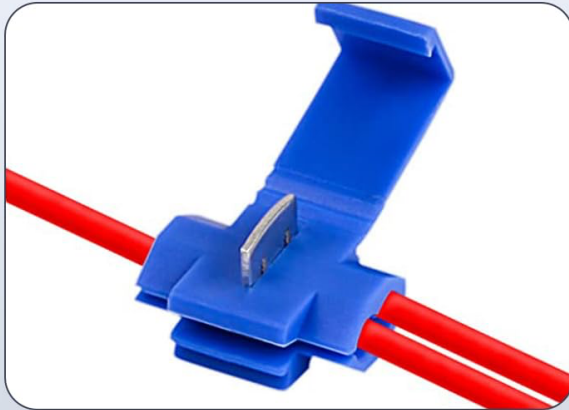


1 Insert the wire into the terminal hold and the branch line into the inside groove.

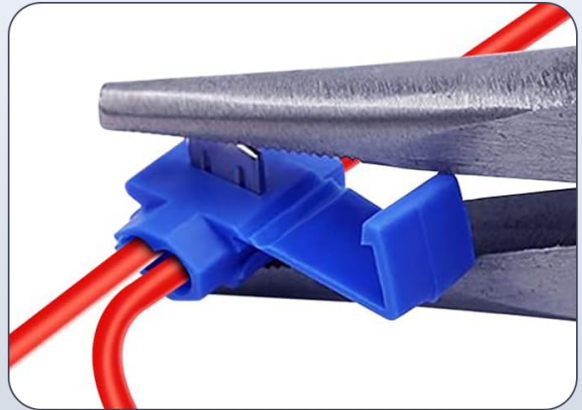

2 Press the contact sheet tightly with pliers.

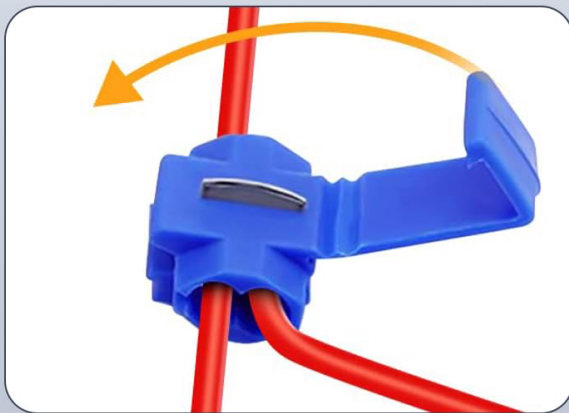

3 Pull the wire to check if it is firm.

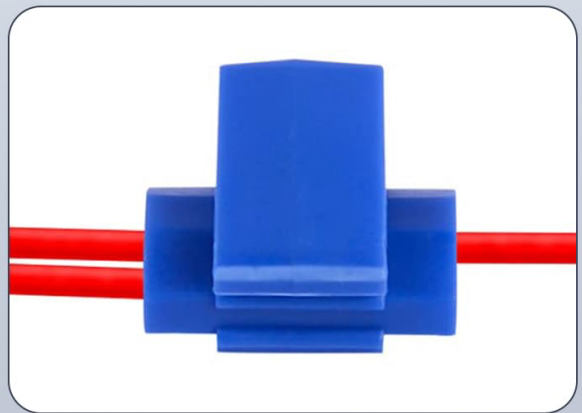

4 Complete the connection with the plastic cover.

NOTE: The male terminals of ignition switch are labeled on the back of the ignition switch and can be read by unplugging the ignition switch from the truck-side harness.

2017 + International Installation Guide

Step 5: Connect the Datalink Harness

- Locate the harness labelled “Datalink Harness”.
- Remove the green 9-pin diagnostic connector located by the driver side footwell.
- Connect one male plug of the Datalink Harness to the vehicles green 9-pin diagnostic connector, and insert the female plug of the Datalink Harness into the dash panel cutout – in place of the vehicles original green 9-pin diagnostic connector.
- Connect the DB15 connector of the Datalink Harness to the Smart Starter control module.
- Secure the Datalink Harness with zip-ties as needed.



Step 6: Connect the Auxiliary Harness

- Locate the 20-pin connector harness labeled “Auxiliary Harness”
- This harness will consist of three pairs of wires for: 1) the hood switch (17ft length), the start-up buzzer (10ft length), and the auto start switch (5ft length).

2017 + International Installation Guide

- Run the hood switch and start-up buzzer wires through the firewall to the engine bay. Some trucks have designated firewall pass-throughs cutout close to the brake pedal. If your truck does not have a designated pass-through, drill a hole through the firewall and run the wires through that.
- Run the auto start switch wires behind the dash to the location where you will be installing the auto start switch.
- Connect the 20-pin connector to the 20-pin connector on the Smart Starter control module.
- Secure the Auxiliary Harness with zip-ties as needed.

Step 7: Connect the Hood Switch

- Locate the Hood Switch.
- The hood switch must be attached to the hood by the driver side headlight at an approximate 45 degrees angle. To determine the correct angle of placement, use a multimeter to ensure that the hood switch circuit is open when the trucks hood is fully opened, and the circuit is closed when the hood is closed. If the circuit remains closed when the hood is fully opened, adjust the angle of the hood switch such that the circuit is opened when the hood is fully open.
- Once the correct angle has been determined, secure the hood switch using the attached 2-way tape and the included screws. Ensure that the hood switch does not rub against anything when the hood is closed.
- Run the hood switch harness from the firewall, along the inside of the frame rail, up to the hood switch, and connect it to the hood switch. Ensure that the harness will not be pinched or rub when the hood is opened or closed.
- Secure the harness with zip-ties.

2017 + International Installation Guide



NOTE – When the hood is closed the side of the tilt switch with the wires attached should be angled downward.

Step 8: Connect the Start-up Buzzer

- Locate the Start-up Buzzer.
- Secure the buzzer in an appropriate location in the engine compartment (this may require drilling a hole) using the included 1/4” bolts, washers and nuts, and thread locker.
- Run the Start-up buzzer harness from the firewall to the buzzer and connect the red wire to positive terminal on the buzzer and the black wire to the ground terminal on the buzzer.
- Secure the harness with zip-ties.

2017 + International Installation Guide



Step 9: Connect the Auto Start Switch

- Locate the Auto Start Switch (On/Off toggle switch)
- Drill a hole at your desired location in the dash panel to mount the auto start switch (use a step drill bit)
- Pass the auto start switch harness through the hole and connect the spade terminals to the pins on the back of the auto start switch (polarity does not matter). Ensure that the connections are securely made.
- Push the auto start switch through the hole until it is securely mounted.

2017 + International Installation Guide



Step 10: Connect the Ignition Harness to the Smart Starter Control Module

- Connect the 8-pin connector on the Ignition Harness to the 8-pin plug on the Smart Starter control module.
- The module should now power up. After a few seconds, the module will conduct a systems check by turning the trucks ignition on, and the instrument cluster will become illuminated. The systems check will take approximately 1 minute, after which the ignition will be turned off.

TROUBLESHOOTING: if a fault is found during the systems check the module will turn the ignition on in the following sequences:


2017 + International Installation Guide

Sequence	Fault
1 Cycle (On-Off) of Instrument Cluster	Network Connection Not Made
2 Cycles (On-Off-On-Off) of Instrument Cluster	J1939 Data Not Available
3 Cycles (On-Off-On-Off-On-Off) of Instrument Cluster	Network Connection Not Made & J1939 Data Not Available

Step 11: Install Warning & Auto Start Switch Decals

- Locate the 5 warning decals: (4) larger sized and (1) smaller sized, and the Auto Start decal.
- Install (2) large decals on each of the frame rails in the engine bay and (2) large decals on each of the frame rails by the rear catwalk. Ensure that the decals are installed in such a location that they will be readily visible to any person working on OR around the truck. Prior to installing the decals clean the area with brake cleaner or isopropyl alcohol to ensure good adhesion.
- Install the (1) smaller sized decal inside the driver side door jamb OR on the dash by the key switch. Ensure that the decal is installed in such a location that it will be readily visible to any person who attempts to start the truck. Prior to installing the decal clean the area with brake cleaner or isopropyl alcohol to ensure good adhesion.
- Install the (1) Auto Start decal beside the auto start switch in the cab.

2017 + International Installation Guide

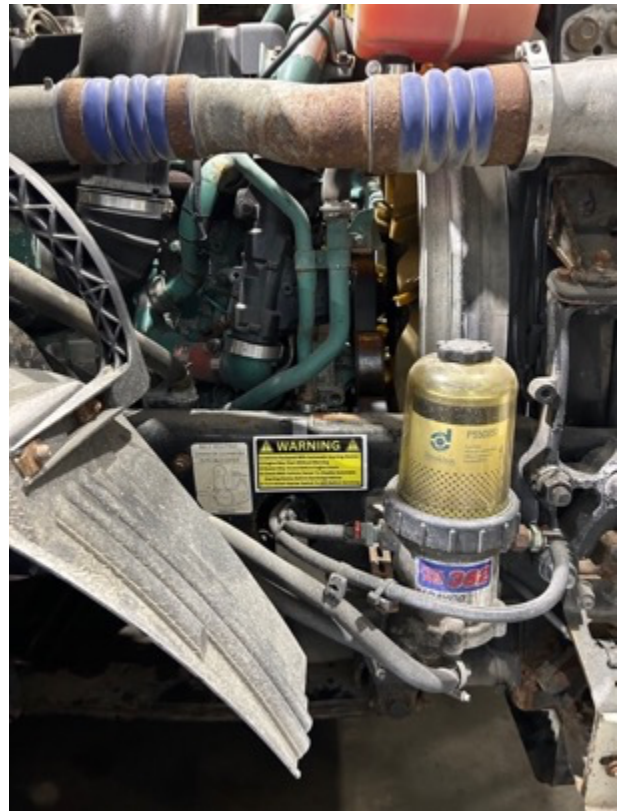

Troubleshooting

- If the control module does not power up check the power supply connections and verify that the constant 12V (+) supply and ground are properly connected.
- If audible clicks can be heard from the control module when the 8-pin connector is connected BUT the instrument cluster does not turn on, verify that the ignition T-harness is properly connected to the key switch and truck side ignition harness.

Contact

If you have any questions or require any assistance during installation you can contact Smart Starter customer support at +1-855-729-0001.